

VXA Packet Tape Drives

Award-Winning Packet Technology

Tandberg Data's award-winning Packet Technology enables VXA packet drives to read and write data on tape using digital packets, just like the Internet. As a result, VXA is an extremely secure way to store, archive, retrieve and exchange data.

The Packet technology provides far superior data restore integrity, exceptional transfer speed and scalable tape capacities. With check after write and 4-level Reed-Solomon error Correction, VXA products are the only tape devices that are up to 180 times more likely to restore your data than other technologies—even from a damaged tape.

Our packet tape drives work with every major operating system including Microsoft™ Windows, Linux, MacOS, Novell Netware and most flavors of Unix. They are supported by most popular backup applications and come with 3 years of warranty and support.

Tandberg Data's VXAtape™ cartridges are the perfect complement to VXA technology. They provide the necessary features needed for Tandberg Data VXA tape drives, autoloaders and libraries.

The Tandberg Data portfolio of VXA Packet Tape Drives includes the following portfolio of products:

VXA-2 Drive:

Capacity: 80-160GB at a transfer rate of 6MB/s to 12MB/s

Available with a SCSI-2 LVD/SE, IDE or FireWire interface


The only tape drive that allows DDS users to migrate to a higher capacity, higher performance tape backup product at the same cost

VXA-320 Drive:

Capacity: 160-320GB at a transfer rate of 12MB/s to 24MB/s

Available with FireWire or SCSI HD Ultra 160 interface

Unique combination of greater capacity, faster data transfer rates and improved data reliability is a great match for the SMB/departmental environment

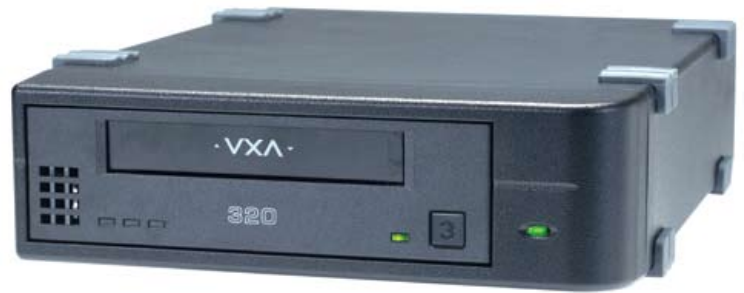

Key Benefits

== The New Standard

Selected by OEMs—including IBM, Apple and Toshiba—providing a definitive endorsement of VXA Packet Tape Drives as the new standard for tape storage in its class.

== Scalable Capacity

VXA Packet Drives and tapes offer scalable capacity—up to four media length choices provide just the right capacity for today's backup needs and the flexibility to scale for future data growth

== Disaster Tested

Three generations of VXA products have been disaster tested by Tandberg Data and independent labs under the most severe conditions—including violent vibration, immersion in volcanic dust, boiling water and hot coffee, and even freezing cartridges in ice—to ensure reliable and complete data restores

== Minimize Downtime

All VXA drives are supported with a 3-year warranty and 1 year Advanced Replacement Service



VXA Drives read and write data on tape using digital packets providing a secure way to store, archive, retrieve and exchange data.

TANDBERG DATA
Securing your Information

Specifications

	Tandberg VXA-2 Drive	Tandberg VXA-320 Drive		
Capacity	X23 80/160GB V17 59/118GB X10 40/80GB X6 20/40GB	X23 or V23 160/320GB X10 86/172GB X6 40/80GB		
Performance	Search Rate (max) 165 x read/write Speed (990MB/s native)	Search Rate (max) 165 x read/write Speed (1.98GB/s native)		
Transfer Rate Average Sustained (native/compr.)	SCSI Ultra2 LVD/SE: 6MB/s (21.6 GB/hr) / 12 MB/s (43.2 GB/hr) FireWire/IEEE 1394A: 6MB/s	12MB/s (43.2GB/hr) 24 MB/s (86.4GB/hr)		
Transfer Rate Burst	80MB/s	160MB/s		
Buffer Size	2MB	8MB		
File Access Time	<10 seconds	30 seconds		
Interface	SCSI, FireWire	FireWire 800, HD LVD Ultra 160 SCSI, USB 2.0		
Reliability	MTBF 300,000 hours, ECC Error Correction: 4-layer Reed Solomon ECC Hard Error Rate: <1 in 1x 10¹⁷ bits	MTBF 300,000 hours ECC Error Correction: 4-layer Reed Solomon ECC Hard Error Rate: <1 in 1x 10¹⁷ bits		
Temperature	Operating: 5C to 45C (41F to 113F) Non-operating: -40C to 60C (-40F to 140F)	Operating: 5C to 45C (41F to 113F) Non-operating: -40C to 60C (-40F to 140F)		
Rel. Humidity (operating)	20 to 80% (non-condensing)	20 to 80% (non-condensing)		
Power Requirements	100-240VAC	100-240VAC		
Power Consumption	8W	23W		
Agency Certifications	UL, CSA, IEC (bare drive) UL, CSA, IEC, FCC, CISPR, VDE, TUV (tabletop enclosure)	UL, CSA, IEC (bare drive) UL, CSA, IEC, FCC, CISPR, VDE, TUV (tabletop enclosure)		
Warranty	3-Years Warranty	3-Years Warranty		
Recording Method	Packetized data, 128 bytes per packet, helical scan	Packetized data, 128 bytes per packet, helical scan		
Read and Write Formats	Read: VXA-1, VXA-2 Read and Write: VXA1, VXA-2	Read: VXA-2, VXA-320 (VXA-3) Read and Write: VXA-2, VXA320-(VXA3)		
Media X6, X10, X23	Advanced Metal Evaporated (AME) media	Advanced Metal Evaporated (AME) media		
Drive Cleaner	Tandberg Data VXA cleaning cartridge is required for all units	Tandberg Data VXA cleaning cartridge is required for all units		
Software Compatibility <small>*Assumes a 2:1 compression ratio</small>	Compatible with all major backup applications and operating systems.	Compatible with all major backup applications and operating systems.		
Form Factors	Internal Dimensions	External Dimensions	Internal Shipping Dimensions	External Shipping Dimensions
Height:	1.63 in. (41.4mm)	3.38 in. (86mm)	7 in. (177.8mm)	7 in. (177.8mm)
Width:	5.75 in. (146mm)	8.93 in. (227mm)	11 in. (279.4mm)	15 in. (381mm)
Length:	8.0 in. (203mm)	11.25 in. (268mm)	14 in. (355.6mm)	21 in. (533.4mm)
Weight	2.2 lbs. (1kg)	6.6 lbs. (3kg)	4 lbs. (1.8kg)	10 lbs. (4.5kg)

About Tandberg Data

Tandberg Data is a leading global supplier of backup and archiving technologies. Tandberg Data offers a complete range of tape libraries, tape autoloaders and tape drives (based on the LTO™, SLR™, VXA® tape technology platforms), storage software, data media and disk-based storage such as the RDX™ QuikStor. These solutions are marketed exclusively through a channel of qualified resellers and distributors. These solutions are underpinned by OEM agreements with major server manufacturers including IBM, Hitachi, Fujitsu, Fujitsu-Siemens, Apple and Dell and supported by all major operating systems and storage software applications to operate in heterogeneous network environments. All solutions are designed to meet the growing storage requirements of small and medium-sized organisations with scalability, reliability and backward compatibility features that ensure cost effective operation and long-term investment protection.

Tandberg Data ASA
Økernveien 94
N-0579 Oslo
Norway
Tel: +47 (0) 2218 9090
Fax: +47 (0) 2218 9550

Tandberg Data GmbH
Feldstrasse 81
44141 Dortmund
Germany
Tel: +49 (0) 231 5436 - 0
Fax: +49 (0) 231 5436 - 111

Tandberg Data Limited
Bloxham Mill Business Centre
Barford Road, Bloxham
Banbury, England, OX15 4FF
Tel: +44 (0) 845 070 6916
Fax: +44 (0) 1295 722 109

Tandberg Data S.A.S.
16-18, avenue Morane Saulnier - Bât.A
78941 Vélizy Cedex
France
Téléphone: +33 (0)1 39 26 01 01
Télécopie: +33 (0)1 34 65 02 89

Tandberg Data Corporation
2108 55th Street
Boulder, CO 80301
USA
Tel: 303.442.4333
Fax: 303.417.7170

Tandberg Data (Asia) Pte Ltd
20 Bendemeer Road
#04-05 Cyberhub
Singapore 339914
Tel: +65 (0) 6396 0786
Fax: +65 (0) 6396 0787

In addition to the offices above TANDBERG DATA ASA has branch offices in the United Kingdom, France, Italy, India, China (PRC), Thailand and Brazil. TANDBERG DATA ASA is a publicly held company based in Oslo, Norway and is traded on the Oslo Stock Exchange (ticker=TAD). Specifications subject to change without notice. RDX QuikStor, BAKStor, and SLR are trademarks of Tandberg Data ASA. RDX is a registered trademark of ProStor Systems. LTO is a trademark of HP, IBM and Quantum. All other trademarks are the property of their respective owners. ©2007 TANDBERG DATA. All rights reserved.

DS-VXADR_EMEA_2007

salesemea@tandbergdata.com 00 800 8263 2374 (00 800 TANDBERG)

www.tandbergdata.com